


BRANCO

Data sheet for three-phase Squirrel-Cage-Motors

Ordering data: BA1-112M-2

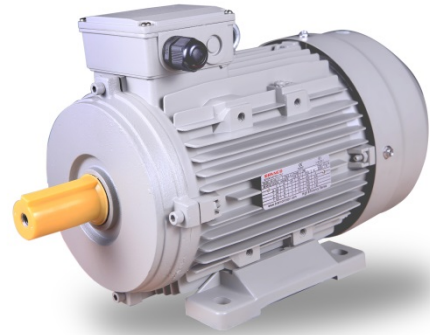

Client order no.:
Project:
Item series no.:
Remarks:

Electrical Data	
Rated motor voltage:	400VD/690VY
Frequency:	50 Hz
Rated motor power:	4 kW
Rated speed:	2890 r/min
Number of poles:	2
No load current:	2.8 Amp
Rated current:	7.9 Amp
Locked rotor torque:	30.8 N.m.
Pull out torque:	27.4 N.m.
Efficiency class:	IE1
Efficiency 100% load:	83.87
Efficiency 75% load:	85.76
Power factor 100% load:	0.90
Motor protection:	Without
Terminal box position:	Top

Mechanical Data	
Noise (Lw):	77 dB (A)
Bearing drive end:	6306 ZZ
Bearing non drive end:	6306 ZZ
Drain holes:	No
Grease nipper:	No
Coating:	RAL 7030

Site Conditions	
Ambient temperature:	40°C
Altitude above sea level:	1000m
Standard of specifications:	IEC 60034

General Data	
Frame Size:	112M
Type of construction:	IMB3
Weight:	26 kg
Frame material:	Cast iron
Fan cover material:	Metal
Degree of protection:	IP 55
Method of cooling:	TEFC
Insulation:	F
Duty type:	S1
Direction of rotation:	Bidirectional

Terminal Box	
Material of Terminal box:	Aluminium
Terminal screw thread:	M4
Cable diameter:	18 - 25mm
Cable entry:	M32x1.5
Cable gland:	Yes

Special Design	