


BRANCO

Data sheet for three-phase Squirrel-Cage-Motors

Ordering data: BA1-132S2-2

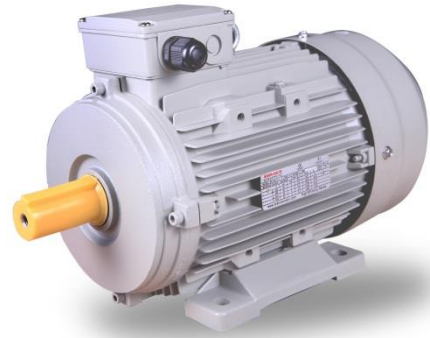

Client order no.:
Project:
Item series no.:
Remarks:

Electrical Data

Rated motor voltage:	240VD/400VY
Frequency:	50 Hz
Rated motor power:	7.5 kW
Rated speed:	2920 r/min
Number of poles:	2
No load current:	5.05 Amp
Rated current:	14.3 Amp
Locked rotor torque:	58.6 N.m.
Pull out torque:	53.2 N.m.
Efficiency class:	IE1
Efficiency 100% load:	88.17
Efficiency 75% load:	88.81
Power factor 100% load:	0.89
Motor protection:	Without
Terminal box position:	Top

Mechanical Data

Noise (Lw):	80 dB (A)
Bearing drive end:	6308 ZZ
Bearing non drive end:	6308 ZZ
Drain holes:	No
Grease nipper:	No
Coating:	RAL 7030

Site Conditions

Ambient temperature:	40°C
Altitude above sea level:	1000m
Standard of specifications:	IEC 60034

General Data

Frame Size:	132S
Type of construction:	IMB3
Weight:	41.30 kg
Frame material:	Cast iron
Fan cover material:	Metal
Degree of protection:	IP 55
Method of cooling:	TEFC
Insulation:	F
Duty type:	S1
Direction of rotation:	Bidirectional

Terminal Box

Material of Terminal box:	Aluminium
Terminal screw thread:	M4
Cable diameter:	18 - 25mm
Cable entry:	M32x1.5
Cable gland:	Yes

Special Design

--