


# BRANCO

## Data sheet for three-phase Squirrel-Cage-Motors

Ordering data: BA1-160L-4

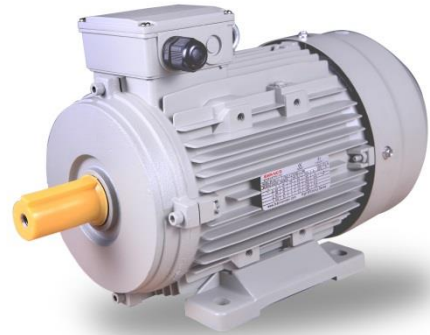

Client order no.:  
Project:  
Item series no.:  
Remarks:

Electrical Data	
Rated motor voltage:	400VD/690VY
Frequency:	50 Hz
Rated motor power:	15 kW
Rated speed:	1460 r/min
Number of poles:	4
No load current:	10.91 Amp
Rated current:	28.7 Amp
Locked rotor torque:	263.91 N.m.
Pull out torque:	204.2 N.m.
Efficiency class:	IE1
Efficiency 100% load:	87.86
Efficiency 75% load:	88.84
Power factor 100% load:	0.86
Motor protection:	Without
Terminal box position:	Top

Mechanical Data	
Noise (Lw):	75 dB (A)
Bearing drive end:	6309 ZZ
Bearing non drive end:	6309 ZZ
Drain holes:	No
Grease nipper:	No
Coating:	RAL 7030

Site Conditions	
Ambient temperature:	40°C
Altitude above sea level:	1000m
Standard of specifications:	IEC 60034

General Data	
Frame Size:	160L
Type of construction:	IMB3
Weight:	88.5 kg
Frame material:	Cast iron
Fan cover material:	Metal
Degree of protection:	IP 55
Method of cooling:	TEFC
Insulation:	F
Duty type:	S1
Direction of rotation:	Bidirectional

Terminal Box	
Material of Terminal box:	Aluminium
Terminal screw thread:	M5
Cable diameter:	22 - 32mm
Cable entry:	M40x1.5
Cable gland:	Yes

Special Design	